


# Robertshaw®

# 9801i2 9825i2

**DELUXE SERIES  
PROGRAMMABLE  
THERMOSTATS**

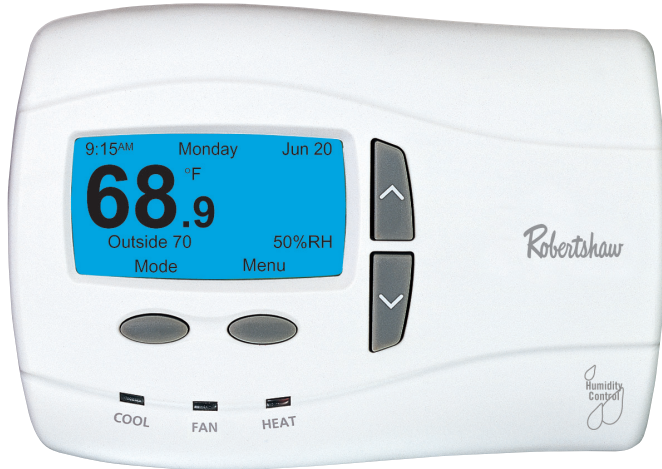

## Homeowner Comfort and Contractor Convenience

### Spend less time installing thermostats

The Robertshaw® 9800i2 series thermostat makes installation easy. Your customers will appreciate how easy it is to control the humidity and temperature, and you will value how simple it is to install and program. This versatile thermostat provides control over both humidification and dehumidification. When used in conjunction with our 9025i outdoor sensor, the thermostat automatically controls indoor humidity levels maintaining optimal comfort while minimizing condensation on windows. Your customers will enjoy maximum comfort and energy savings and you will benefit from the time and effort saved by installing a single device that does the work of two.

The Set-up Wizard allows you to spend 50% less time setting up the thermostat over competitive models. Every menu provides step-by-step instructions so there are no complicated codes or button combinations to memorize.

The 9800i2 series is so user friendly, it sets a higher standard in efficiency and simplicity for programmable thermostats. It is truly comfort made easy.

Robertshaw - *Simply the Right Choice™*



#### Optional Sensors:

9020i REMOTE INDOOR

9025i REMOTE OUTDOOR


### Menu Driven Display

**7 Day Programmable with 2, 4 or 6 Events Per Day**

**9801i2 - 1 Heat / 1 Cool**


**9825i2 - Universal Staging up to 3 Heat / 2 Cool**

## Features and Benefits




#### Set-up Wizard

Helps speed through the installation process with step-by-step setup and programming instructions.




#### Trilingual Display Option

Set to your customers' language of choice – English, Spanish or French.



#### Convenient Displays

View a full day of programming at once for quick review or easy adjustment.



#### Contractor ID Feature

Set it yourself or custom order with your information preloaded. Your name and phone number remind your customers when service is needed.

#### Daylight Saving Time Adjustment

Automatically adjusts to correct time regardless of seasonal changes.

#### Adjustable Backlighting

Choose to have backlighting on at all times or only when programming. You can also adjust the brightness and contrast for improved readability.

#### Time of Day Zoning

When coupled with a remote sensor (part #9020i), you can control the temperature in remote locations given different scheduled events.

#### Three Levels of Security

Secure protection against unwanted changes to the programming menus, temperature or set-up functions with your own 4-digit PIN.

#### Auto Changeover

Automatically adjusts between heating and cooling cycles to maintain optimal comfort.

#### Worry-Free Memory Storage

Even during power outages, the thermostat maintains set point and programmed parameters.

#### Adjustable Temperature Offset

Change the displayed temperature from the actual sensed temperature.

#### Adjustable Temperature Differential

Maintains optimal customer comfort.

An ISO 9001 – 2008 Certified Company


California Title  
24 Compliant

**5** Year  
Limited  
Warranty




### Terminal Designations

#### 9801i2

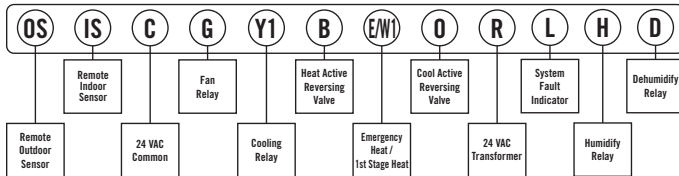

#### 9825i2

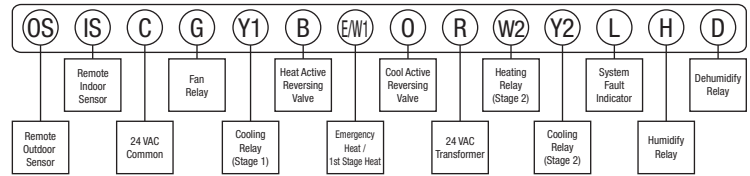

### Technical Specifications

|                                       |   |
|---------------------------------------|---|
| <b>Electrical Rating</b>              | 24 Volt AC (18-30 VAC)<br>1 amp maximum load per terminal (relay outputs)<br>3 amp total maximum load (all terminals combined)  |
| <b>Temperature Control Range</b>      | 45° - 90°F (7° - 32°C)  |
| <b>Accuracy</b>                       | +/-1.0°F (+/-0.5°C)   |
| <b>Power Source</b>                   | 24 VAC  |
| <b>Auto Changeover Deadband</b>       | Selectable 2° to 8°F  |
| <b>Temporary Temperature Override</b> | From 10 minutes to 365 days   |
| <b>Remote Sensor Capable</b>          | 1 indoor and 1 outdoor sensor   |
| <b>System Configurations</b>          | <b>9801i2</b> - Single-stage gas, oil or electric heating/cooling systems and single stage heat pump systems<br><b>9825i2</b> - Multi-stage gas, oil, or electric heating/cooling systems including multi-stage heat pump systems |
| <b>Terminations</b>                   | <b>9801i2</b> - OS, IS, C, G, Y1, B, E/W1, O, R, L, H, D<br><b>9825i2</b> - OS, IS, C, G, Y1, B, E/W1, O, R, W2, Y2, L, H, D  |

### Shipping Specifications

|   |  |
|---|--|
| Indiv. Ctn. Dim.: 6.625" x 4.25" x 1.625" | <b>Item 9020i and 9025i Remote Sensors</b>   |
| Master Ctn. Qty.: 6                       | Indiv. Ctn. Dim.: 2.625" x 1.5625" x 4.4375" |
| Master Ctn. Dim.: 9.25" x 5.625 x 7.5"    | Master Ctn. Qty.: 6                          |
| Master Ctn. Cu. Ft.: .23                  | Master Ctn. Dim.: 5.625" x 5.125" x 5.125"   |
| Master Ctn. Wt.: 3.5 lbs.                 | Master Ctn. Cu. Ft.: .09                     |
| Max. Pallet Qty.: 1260                    | Master Ctn. Wt.: .78 lbs.                    |
| Max. Pallet Wt.: 785 lbs.                 |  |

### Replacement Chart

|               | 9801i2   | 9825i2      |
|---------------|----------|-------------|
| Braeburn®     |          | 5400        |
| Honeywell     |          | TH8321U1006 |
| White-Rodgers | 1F97-391 | 1F95-391    |
| Carrier       |          | TP-PRH01-A  |
| Lux           | TX1500E  | PSPHA732    |

Verify specific application requirements before substitution.

Robertshaw Climate  
PO Box 3161  
Grapevine, TX 76099  
www.robertshawclimate.com  
844-362-4822  
support@robertshawclimate.com

Robertshaw® and Simply the Right Choice™ are trademarks of Schneider-Electric, its subsidiaries and/or affiliated companies. All other brands mentioned may be the trademarks of their respective owners.

© 2015 Robertshaw Climate

### Feature Comparison

|  | Robertshaw<br>9800i2 Series | Honeywell<br>TH8321U1006 | White-Rodgers<br>1F95-391 |
|--|-----------------------------|--------------------------|---------------------------|
| Menu Driven (Ease of Programming)                              | X                           |                          |                           |
| Installation Wizard  | X                           |                          |                           |
| Displays Complete Program                                      | X                           |                          |                           |
| Adjustable Backlighting  | X                           |                          |                           |
| Cooling System Monitor   | X                           |                          |                           |
| Heating System Monitor   | X                           |                          |                           |
| Multi-Language; capable of up to 3 languages                   | X                           |                          |                           |
| 1/2 Degree Resolution  | X                           |                          |                           |
| Time of Day Zoning   | X                           |                          |                           |
| LED Status Indicators  | X                           |                          |                           |
| Integrated Fossil Fuel Kit Converter for Heat Pump Application | X                           |                          |                           |
| Events per Day: 2, 4, 6  | X                           |                          |                           |
| 5/2 Program  | X                           |                          |                           |
| 24 Hour Program  | X                           |                          |                           |
| Remote Outdoor Sensor  | X                           |                          |                           |
| Customizable Contractor ID                                     | X                           |                          |                           |
| Adjustable Residual Cooling                                    | X                           | X                        |                           |
| 12 or 24 Hour  | X                           | X                        |                           |
| Dehumidification   | X                           | X                        |                           |
| Humidification   | X                           |                          | X                         |
| 5/1/1 Program  | X                           |                          | X                         |
| 7-Day Program  | X                           | X                        | X                         |
| Stages: 1H/1C  | X                           | X                        | X                         |
| Stages: 2H/2C  | X                           | X                        | X                         |
| Large Display  | X                           | X                        | X                         |
| Adjustable Timed Override                                      | X                           | X                        | X                         |
| Adjustable Timed Hold  | X                           | X                        | X                         |
| Automatic Daylight Saving Time Adjustment                      | X                           | X                        | X                         |
| Adjustable Temperature Limits                                  | X                           | X                        | X                         |
| High/Low Balance Points  | X                           | X                        | X                         |
| Adjustable Differential  | X                           | X                        | X                         |
| Adjustable Compressor Short Cycle Protection                   | X                           | X                        | X                         |
| Battery Free Memory Retention                                  | X                           | X                        | X                         |
| Manual Override  | X                           | X                        | X                         |
| Resume   | X                           | X                        | X                         |
| Auto Changeover  | X                           | X                        | X                         |
| Gas/Electric   | X                           | X                        | X                         |
| Single Stage Heat Pump Compatible                              | X                           | X                        | X                         |
| Line Powered   | X                           | X                        | X                         |
| Programmable Fan   | X                           | X                        | X                         |
| °F and °C  | X                           | X                        | X                         |
| Air Filter Monitor   | X                           | X                        | X                         |
| Humidifier Pad Monitor   | X                           | X                        | X                         |
| UV Light Monitor   | X                           | X                        | X                         |
| Vacation Setting   | X                           | X                        | X                         |
| O & B Terminals  | X                           | X                        | X                         |
| 4 Hour Reserve   | X                           | X                        | X                         |
| Remote Indoor Sensor   | X                           | X                        | X                         |
| Energy Efficient Recovery                                      | X                           | X                        | X                         |
| Pre-set Program  | X                           | X                        | X                         |
| Hidden Service Level   | X                           | X                        | X                         |
| Security Key Pad   | X                           | X                        | X                         |
| Temperature Recalibration                                      | X                           | X                        | X                         |